

GT3000 Toxic Gas Sensor/Transmitter



Gases Detected

- H₂S
- Cl₂
- SO₂
- CO
- H₂
- NH₃
- O₂
- More gases added soon

Cost-Effective

Approved for use with or without local display. And offers one-person calibration, ideal for remote mounting.

High Accuracy

Even in extreme climates, provides consistent operation and third-party verified accuracy and performance.

Easy Field Swapping

Intrinsically safe and automatically recognizes new sensors (hot swappable).

Onboard Data and HART® Diagnostics

- Event logs
- Gas exposure data
- Calibration data
- High/low temperature data

*Rely on the GT3000 toxic gas detector family to continuously **monitor** the atmosphere for potentially hazardous **gas leaks and oxygen depletion.***

An array of sensor models detect a variety of gases in various concentration ranges.

Flexible Installation

Can be installed as a stand-alone device. Or the sensor/transmitter can be combined with a local or remote display, such as the Det-Tronics FlexVu® Universal Display.

Functional and Fast

Can exceed the ISA specification T90 requirement in under 30 seconds.

Reliable Operation

Proven through third-party performance testing to the ISA-92.0.01 standard.



Easy to Install, Simple to Calibrate and Maintain

The GT3000 toxic gas detector is an intelligent stand-alone industrial gas detector that provides continuous monitoring of the atmosphere for hazardous gas leaks or oxygen depletion.

The GT3000 gas detector consists of a replaceable sensor module (Model GTS) connected to a transmitter module (Model GTX) that is compatible with all GTS sensor modules. A variety of sensor modules are available in various concentration ranges.



Innovative Design by Det-Tronics

GTX Transmitter

- 4-20 mA output with HART protocol
- Approved for use in explosion-proof or intrinsically safe areas
- Automatic sensor recognition



GTS Sensor Module

- Sensors: H₂S, CO, O₂, NH₃, Cl₂, H₂, and SO₂
- Multiple ppm measurement ranges
- IP66 ingress protection
- Hot swappable
- History logs



GT3000 Detector

- Approved as stand-alone gas detector
- Local LED indicators
- Magnetic calibration




Detector with FlexVu Display

- Approved as stand-alone gas detector
- 4-20 mA output with HART protocol
- Magnetic calibration
- Non-intrusive user interface
- Single data log with a common interface for event, fault, and alarm data



A Complete Safety System Designed around Customer Requirements

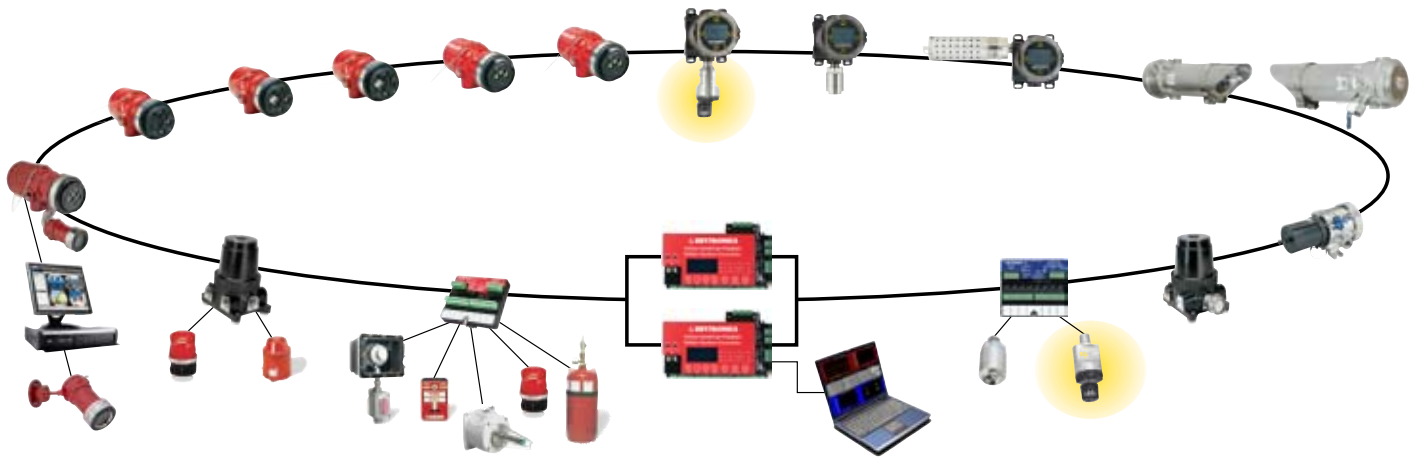

Approved to ANSI / ISA
92.0.01 (H₂S)
92.02.01 (CO)



Detector Electronics Corporation
6901 West 110th Street
Minneapolis MN 55438 USA

952.941.5665 or 800.765.3473 ph
952.829.8750 fax
www.det-tronics.com
det-tronics@det-tronics.com